


CITY OF CHEYENNE
PARKS AND RECREATION DEPARTMENT
EAST CHEYENNE GREENWAY
PHASE IIIb, PART 2
CHEYENNE, WYOMING
6TH PENNY SALES TAX PROJECT

FINAL PLANS
BID No. _____

INDEX OF SHEETS

- 1 TITLE SHEET
- 2 BID QUANTITIES AND NOTES
- 3 TYPICAL SECTIONS
- 4 ENCLOSED FENCE DETAILS
- 5 PATH PLAN AND PROFILE SHEET
- 6 - 7 CONCRETE DITCH PLAN AND PROFILE SHEETS

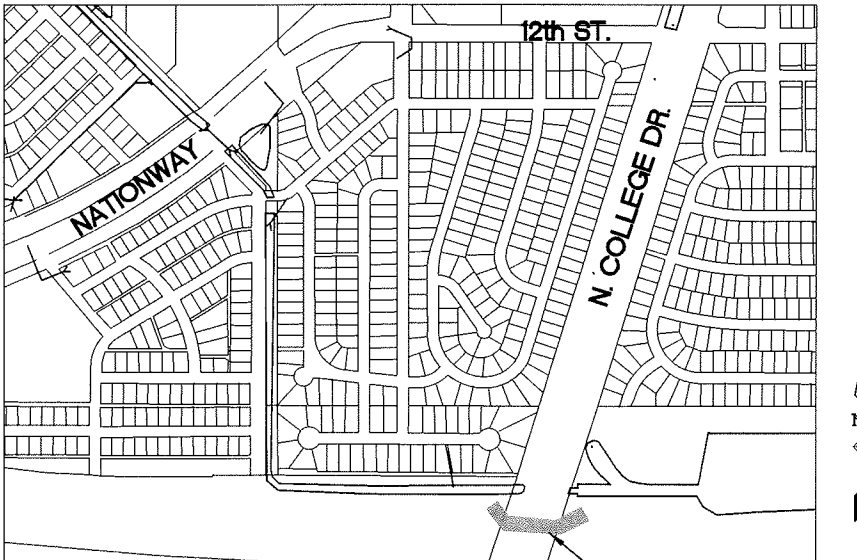

VICINITY MAP
SCALE: 1"=500'

PROJECT CONTROL POINTS

NUMBER	NORTHING	EASTING	ELEVATION	PAGE #
CP1	68759.86	610595.47	5987.84	PP1
CP2	68791.96	610346.73	5990.55	PP1
CP3	69287.48	606858.20	6037.52	*
CP4	69536.99	605674.20	6042.80	*

* NOT SHOWN IN THIS PLAN SET

APPROVALS

REVIEWED AND APPROVED PER CITY STANDARDS, ORDINANCES AND CITY CODES	
CITY PARKS AND RECREATION	DATE APPROVED
CITY ENGINEER	DATE APPROVED

GENERAL NOTES

THE CITY OF CHEYENNE AND BOARD OF PUBLIC UTILITIES CONSTRUCTION SPECIFICATIONS AND STANDARD DRAWINGS 2007 SHALL APPLY. ALL WORK SHALL BE IN CONFORMANCE WITH THESE STANDARDS AND SPECIFICATIONS.

THE CONTRACTOR IS RESPONSIBLE FOR SAFETY TO THE PUBLIC BY MINIMIZING THE INTERRUPTION OF THE USE OF ROADS AND PROVIDING SIGNS, FLARES, BARRICADES, ETC. AS NECESSARY.

IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE ACTUAL LOCATIONS AND ELEVATIONS OF EXISTING UTILITIES WHICH MAY BE IN CONFLICT WITH THE PROPOSED CONSTRUCTION. IF A CONFLICT DOES EXIST, THE CONTRACTOR SHALL NOTIFY THE ENGINEER PRIOR TO CONSTRUCTION SO THAT ADJUSTMENTS CAN BE MADE.

'IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY ALL UTILITIES WHEN CONSTRUCTION WORK BEGINS IN THE VICINITY OF ANY UTILITY LINES AND ARRANGE FOR A REPRESENTATIVE OF THE UTILITY TO BE PRESENT IF THE CONTRACTORS OPERATIONS ARE IN CLOSE PROXIMITY TO ANY LINES IN THEIR EXISTING OR RELOCATED POSITION WHICH COULD CREATE A HAZARDOUS CONDITION.'

ENGINEER'S CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION, OR REPORT WAS PREPARED BY ME, OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY REGISTERED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF WYOMING.



Know what's below.
Call before you dig.

AVRES
ASSOCIATES

Engineers/Scientists/Surveyors
214 W. Lincolnway, Suite 22
Cheyenne, WY 82001
Office: (307) 634-9888
Fax: (307) 634-2353

Drawing Name: Q:\32-1219_Greenway\Master\Sheets\Phase IIb\UPRR_Sheets\s-quantities IIb_UPRR.dwg - Current tab: Layout1 - Print Time: Thu, 30 Jul 2009 - 9:12am By: hendond Last Save: Fri, 08 May 2009 - 1:01pm

TOTAL ESTIMATED QUANTITIES

ITEM No.	DESCRIPTION	UNIT	ESTIMATED QUANTITY
1000.1	CONTRACT BOND	LS	LUMP SUM
1030.1	MOBILIZATION	LS	LUMP SUM
1035.1	MISC. FORCE ACCOUNT	FA	\$5,000.00
1050.1	TRAFFIC CONTROL	LS	LUMP SUM
1070.1	INSPECTION AND TESTING FOR Q.C.	LS	LUMP SUM
1335.1	CONSTRUCTION SURVEYING AND STAKING	LS	LUMP SUM
2050.1	REMOVAL AND DISPOSAL OF STRUCTURES AND OBSTRUCTIONS	LS	LUMP SUM
2210.1	UNCLASSIFIED EXCAVATION	CY	64
2210.2	IMPORTED BORROW EXCAVATION	CY	215
2231.1	CRUSHED BASE - GRADING "W"	TON	255
2900.1	SEEDING - DRY LAND MIX	AC	1.5
3340.1	4" CONCRETE GREENWAY PATH w/ FIBER REINFORCING	SY	80
3340.2	INTEGRAL CONCRETE SIDEWALK (4") AND CURB w/ FIBER REINFORCING	LF	486
3340.3	CONCRETE TRICKLE PAN	LF	655
4070.1	7' CHAIN LINK FENCE	LF	80
4070.2	7' CHAIN LINK END PANEL	EA	6
4080.1	ENCLOSED CHAIN LINK FENCE: BLACK VINYL COATED	LF	486

NOTES:

- 1.) REMOVAL AND DISPOSAL OF STRUCTURES AND OBSTRUCTIONS includes:
 - the removal of the existing Type III barricade at Station 32+10.00
 - the removal of 90 ft. ± of 7' chain link fence across path at Sta. 32+33.50
 - the removal of all debris/trash that is located under the College Dr. overpass, between the existing slope paving and bridge piers. Removal of this debris will be necessary to construct the greenway path and 10' wide crushed base path.
- 2.) UNCLASSIFIED EXCAVATION /IMPORTED BORROW EXCAVATION:

LOCATION	CUT (CY)	FILL (CY)	NET (CY)
Project Area EAST of College Dr. Bridge	19	49	30 (fill)
Project Area WEST of College Dr. Bridge	5	230	225 (fill)
From stockpile on East side of College	40		
TOTAL	64	279	215 SHORT

40 CY of material will be obtained from the stock pile created during Phase IIb, Part 1.
The stock pile is located west of Sta. 32+10.
A 10% fill factor has been added into the calculations to account for required compaction.

CONSTRUCTION NOTES:

- 1.) THE PORTION OF THIS PROJECT LOCATED UNDER THE COLLEGE DRIVE OVERPASS IS LOCATED WITHIN A WYDOT EASEMENT.
 - NO MATERIALS OR EQUIPMENT WILL BE STOCKPILED OR PARKED WITHIN THIS EASEMENT SO AS TO CREATE A MAINTENANCE HAZARD.
 - NO WORK WILL BE CONDUCTED FROM THE ROADWAY SURFACE (N. COLLEGE DR.)
 - CONTRACTOR WILL NOTIFY THE WYDOT MAINTENANCE FOREMAN BEFORE ANY WORK IS TO BEGIN WITHIN THE WYDOT EASEMENT AND AFTER THE WORK IS COMPLETED. WYDOT MAINTENANCE FOREMAN: DON BRIDGES 307-777-4386 OR MILTON POTEET 307-777-4142.

GENERAL NOTES:

- 1.) PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL SUBMIT TO THE WYOMING DEPARTMENT OF ENVIRONMENTAL QUALITY (WDEQ) A "NOTICE OF INTENT" (NOI) FOR COVERAGE UNDER THE STATE'S GENERAL NPDES PERMIT FOR STORM WATER DISCHARGE FROM CONSTRUCTION SITES. IN ACCORDANCE WITH THIS PERMIT, THE CONTRACTOR SHALL DEVELOP A POLLUTION PREVENTION PLAN UTILIZING BEST MANAGEMENT PRACTICES (BMP) BEFORE SUBMITTING THE NOI TO THE WDEQ. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING STORM WATER CONTROL PERMITS, AND FOR PREPARING AND MAINTAINING A STORM WATER MANAGEMENT PLAN. THE CONTRACTOR SHALL CONTROL STORM WATER RUNOFF AND DUST, AND PREVENT TRACKING OF MUD DURING ALL CONSTRUCTION ACTIVITIES PER STATE AND FEDERAL REQUIREMENTS THROUGHOUT THE CONSTRUCTION SITE AND UNTIL VEGETATION HAS BEEN RE-ESTABLISHED. THE CONTRACTOR IS RESPONSIBLE FOR CONTINUOUS SEDIMENT AND EROSION CONTROL MAINTENANCE AND FULL REHABILITATION OF ALL DAMAGED IMPROVEMENTS, INCLUDING CULVERTS, TO ORIGINAL OR BETTER CONDITIONS.
- 2.) THE CONTRACTOR SHALL BE RESPONSIBLE FOR INSURING THAT NO MUD OR DEBRIS WILL BE TRACKED ONTO THE EXISTING PUBLIC STREET SYSTEM. MUD AND DEBRIS MUST BE REMOVED BY THE END OF THE WORKING DAY BY A MACHINE BROOM SWEEP OR OTHER METHOD AS APPROVED BY THE CITY OF CHEYENNE INSPECTOR.
- 3.) UNTIL COMPLETION OF CONSTRUCTION, THE SITE SHALL BE CLEANED AND RESTORED TO A CONDITION EQUAL TO, OR BETTER THAN THAT WHICH EXISTED BEFORE CONSTRUCTION, OR TO THE GRADES AND CONDITION AS REQUIRED BY THESE PLANS.
- 4.) EXISTING FENCES, TREES, STREETS, SIDEWALKS, CURB AND GUTTER, LANDSCAPING, STRUCTURES, AND IMPROVEMENTS DESTROYED, DAMAGED, OR REMOVED DUE TO CONSTRUCTION OF THIS PROJECT SHALL BE REPLACED OR RESTORED IN LIKE KIND AT THE CONTRACTOR'S EXPENSE, UNLESS OTHERWISE INDICATED ON THESE PLANS.

GREENWAY PHASE IIb
TOTAL ESTIMATED QUANTITIES
AND NOTES

CITY OF CHEYENNE
PARKS AND RECREATION DEPT.

Revisions	Date

Project Mgr:	GLM
Designed By:	DMH
Drawn By:	DMH
Approved By:	GLM
Date:	05/08/09

PROJECT NO.
32-1219.00


DRAWING NO.

2

SHEET 2 OF 12

Engineers/Scientists/Surveyors
24 W. Lincolnway, Suite 22
Cheyenne, WY 82001
(307) 634-6888
AVRES
ASSOCIATES

Drawing Name: Q:\32-1219-Greenway\Master\Sheets\Phase IIb_UPRR_Sheets\s-typical IIb_UPRR.dwg -- Print Time: Mon, 03 Aug 2009 -- Current tab: TYPICALS -- Plot Date: Thu, 30 Jul 2009 -- 9:13am



10' PATH

1%

4:1


CRUSHED BASE - GRADING "W" TO MEET PATH ELEVATION (SEE NOTE 3.)

3" CRUSHED BASE - GRADING "W"

NATIVE MATERIAL


PROJECT NO.	32-1219.00
DRAWING NO.	T1
SHEET 3 OF 7	

Drawing Name: 0\32-1219_Greenway\Master\Sheets\Phase IIIb_UPRR_Sheets\3-typical IIIb_UPRR.dwg -- Current tab: enclosed FENCE DETAILS -- Print Time: Tue, 28 Jul 2009 -- 1:52pm By: hendond Last Save: Wed, 20 May 2009 -- 10:24am

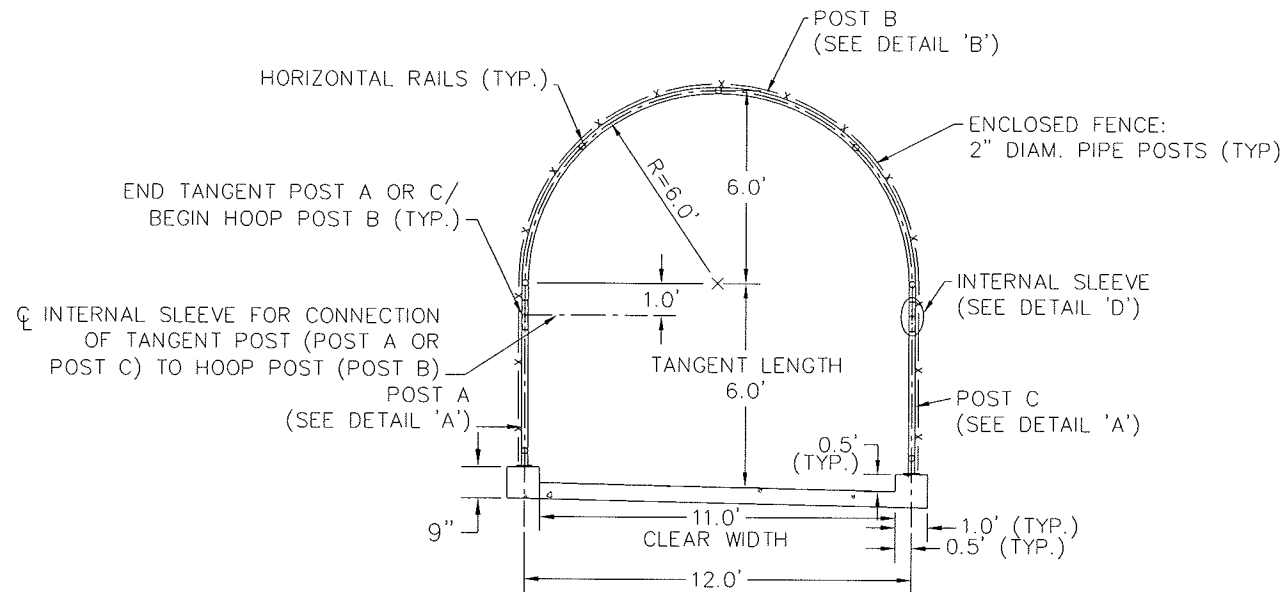


ENCLOSED FENCE
PLAN VIEW


COMPONENT	INFORMATION
POSTS AND RAILS	GALVANIZED STEEL PIPE--2" NPS, SCHEDULE 40 (2.375" OUTER DIAM., 0.154" WALL THICKNESS)
TENSION BARS	$\frac{3}{16}$ " (MIN. THICKNESS) x $\frac{3}{4}$ " (MIN. WIDTH) x (TANGENT OR HOOP LENGTH - 2" MAX.)
TENSION BANDS	No. 14 GAGE (MIN. THICKNESS) x $\frac{3}{4}$ " (MIN. WIDTH) STEEL BANDS

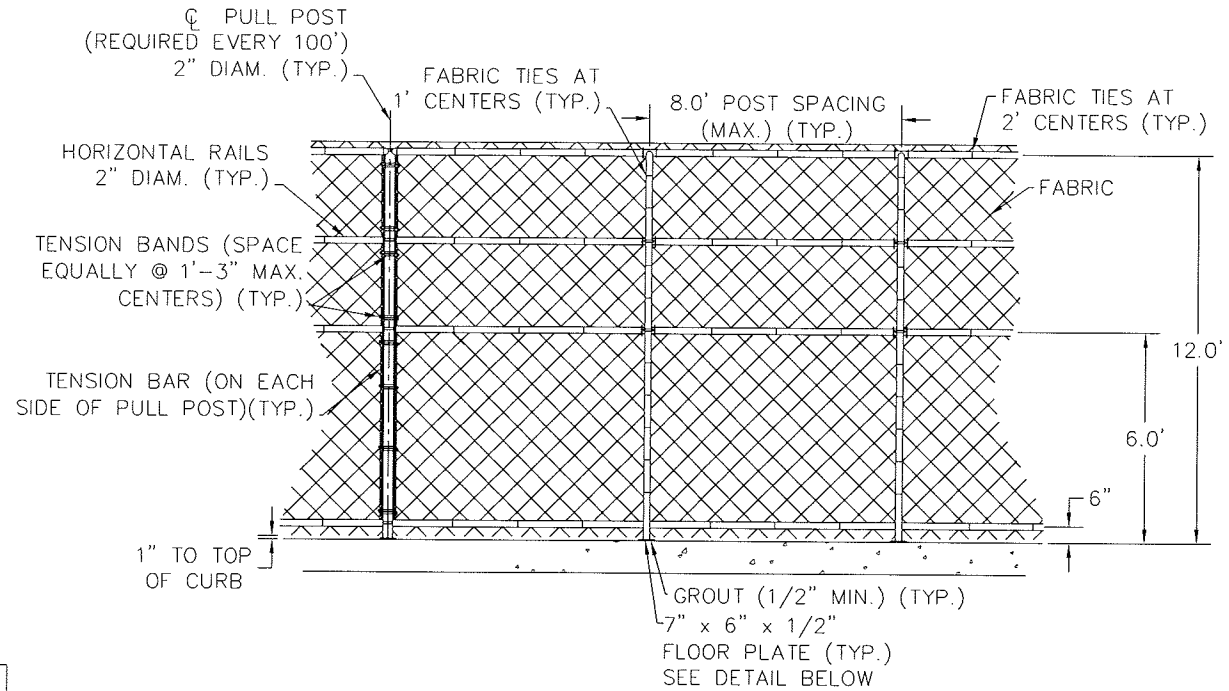


ENCLOSED FENCE
DETAIL FROM INSIDE FACE OF PATH

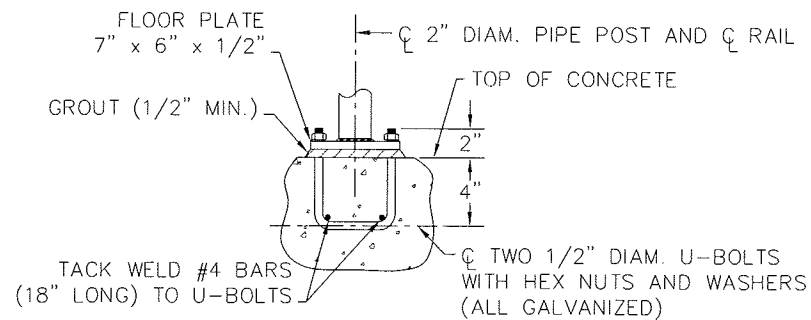

POST CONNECTION
(TYPICAL)

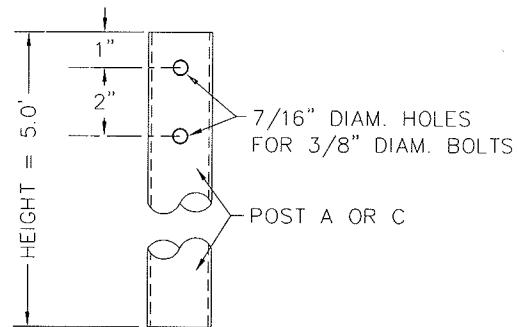

DETAIL 'A'

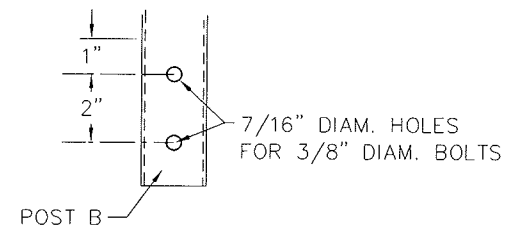

DETAIL 'C'

NOTES:


ALL CHAIN LINK FABRIC SHALL HAVE BOTTOM EDGE KNUCKLED.

CORE WIRE SIZE FOR WIRE FABRIC SHALL BE 6 GAGE MINIMUM.


INSTALL CHAIN LINK FENCE IN ACCORDANCE WITH ASTM F 567 AS APPLICABLE.

ALL RAIL POSTS SHALL BE VERTICAL. GROUT $\frac{1}{2}$ " MINIMUM THICKNESS SHALL BE PLACED UNDER FLOOR PLATES TO PROVIDE FOR VERTICAL ALIGNMENT OF RAIL POSTS.


CHAIN LINK FENCE FABRIC WILL BE COATED WITH BLACK VINYL. (POSTS ARE NOT TO BE VINYL COATED.)

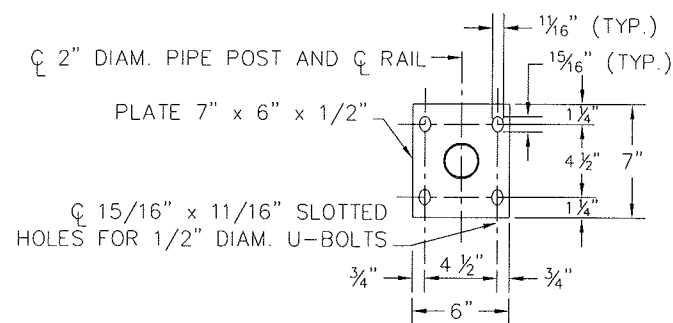

PLAN OF FLOOR PLATE

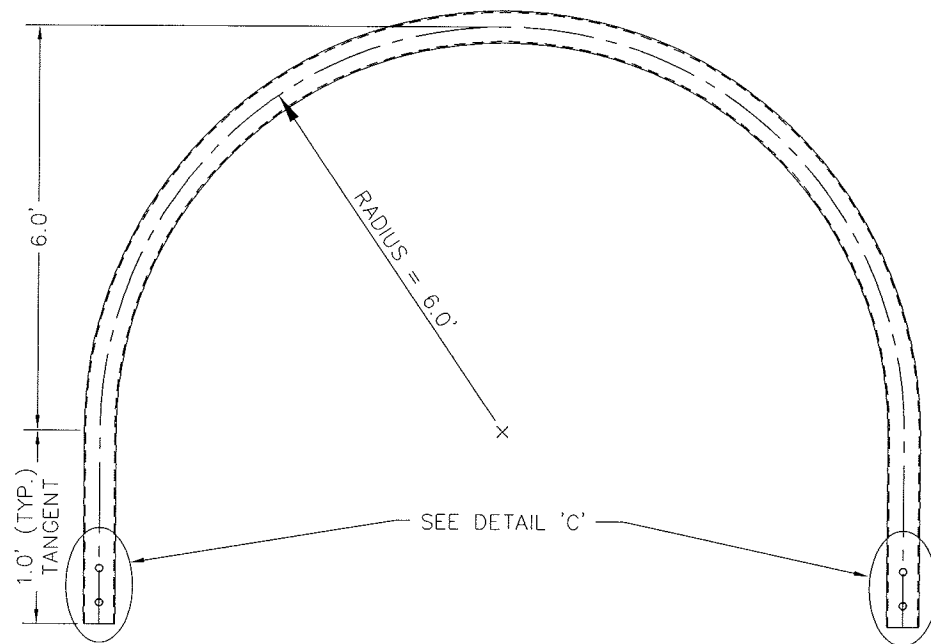

DETAIL 'B'

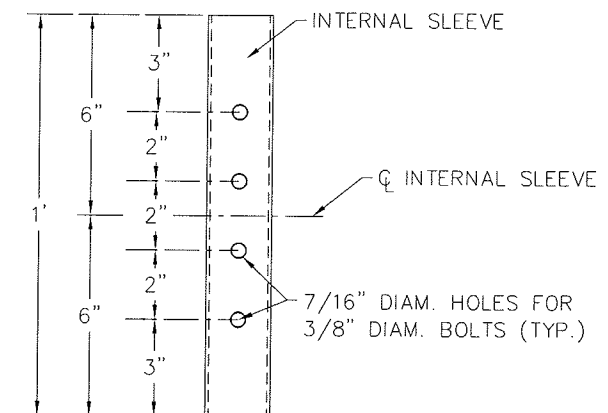

DETAIL 'D'
(INTERNAL SLEEVE DETAIL)

Drawing Name: O:\32-1219_Greenway Master\Sheets\Phase IIIb_Upper_Sheets\9-pp1 IIIb_UPRR.dwg - Current tab: Layout1 - Print Time: Wed, 29 Jul 2009 - 11:03am By: hendond Last Save: Wed, 29 Jul 2009 - 10:03am

NEW 7' CHAIN LINK FENCE: ON THE EAST SIDE OF COLLEGE DR. NEW 7' CHAIN LINK FENCE IS TO BE INSTALLED FROM THE CORNER OF THE EXISTING WYDOT ROW FENCE TO STA. 32+29.00 RT. WHERE IT WILL TERMINATE IMMEDIATELY ADJACENT TO THE ENCASED FENCE. IT WILL BE INSTALLED AT STA. 32+29.00 LT., ADJACENT TO ENCASED FENCE HEADED EAST TO THE NEAREST EXISTING LINE POLE FOR A MINIMUM DISTANCE OF 10'. ON THE WEST SIDE OF COLLEGE DR. NEW 7' CHAIN LINK FENCE WILL BE INSTALLED FROM THE EXISTING WYDOT ROW FENCE TO STA. 37+14.50 RT., WHERE IT WILL TERMINATE IMMEDIATELY ADJACENT TO THE ENCASED FENCE.

BEGIN ENCASED FENCE STA. 32+29.00
EXIST. FENCE (TYP)
CRUSHED BASE PATH
PROPOSED UPRR EASEMENT
END ENCASED FENCE STA. 37+14.50

EXISTING GREENWAY

PROPOSED WEST DITCH
SEE SHEET PP3

PROPOSED EAST DITCH
SEE SHEET PP2



EXIST. TRIPLE BOX CULVERT

WYDOT
R.O.W.

LIMITS OF GRADING (TYP)

CURVE TABLE				
CURVE #	DELTA ANGLE	CHORD DIR.	RADIUS	ARC LENGTH
C15	48°13'48"	S67°59'48"W	200.00 ft	168.35 ft
C16	50°35'03"	N69°10'26"E	150.00 ft	132.43 ft
C17	57°33'00"	S56°45'33"E	50.00 ft	50.22 ft

NOTE: A PORTION OF CURVE 15 WAS BUILT WITH PHASE IIIb, PART 1

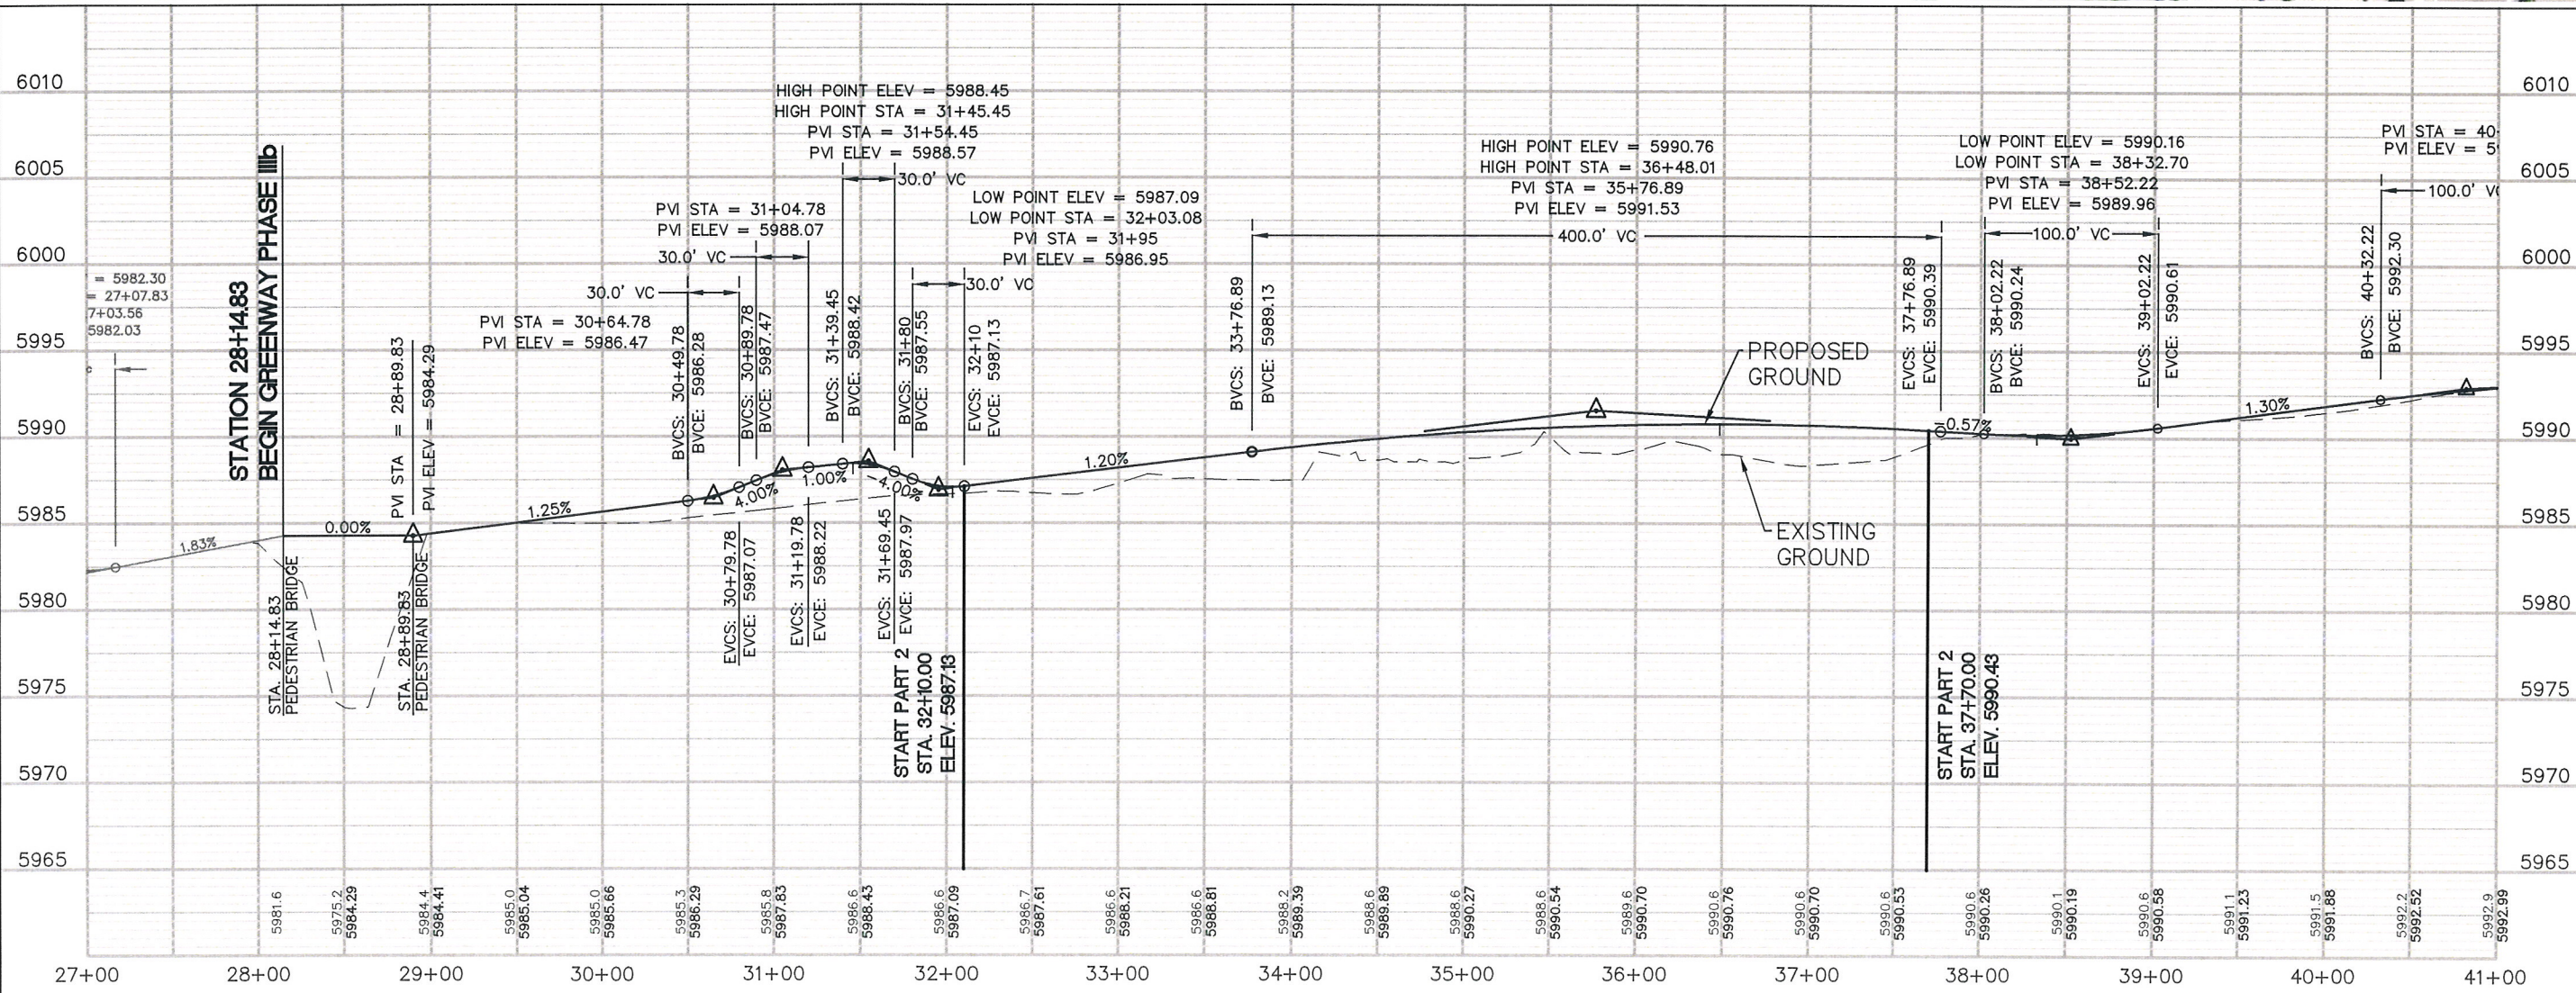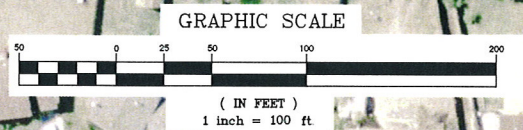

GREENWAY PHASE IIIb
PLAN AND PROFILE


CITY OF CHEYENNE
PARKS AND RECREATION DEPT.

Revisions	Date
City Comments	5/29/29
Project Mgr. GLM	
Designed By: DMH	
Drawn By: DMH	
Approved By: GLM	
Date: 05/08/09	

PROJECT NO.
32-1219.00
DRAWING NO.
PP1
SHEET 6 OF 7

Engineers/Scientists/Surveyors
214 W. Lincolnway, Suite 22
Cheyenne, WY 82001
Office (307) 604-9888
Fax (307) 364-2888
AVRES
ASSOCIATES

Drawing Name: O:\32-1219_Greenway\Master\Sheets\Phase II\UPRR_Sheets\s-pp7 illb_UPRR.dwg - Current tab: Layout1 - Print Time: Wed, 29 Jul 2009 - 10:51am By: hendond Last Save: Wed, 29 Jul 2009 - 10:37am

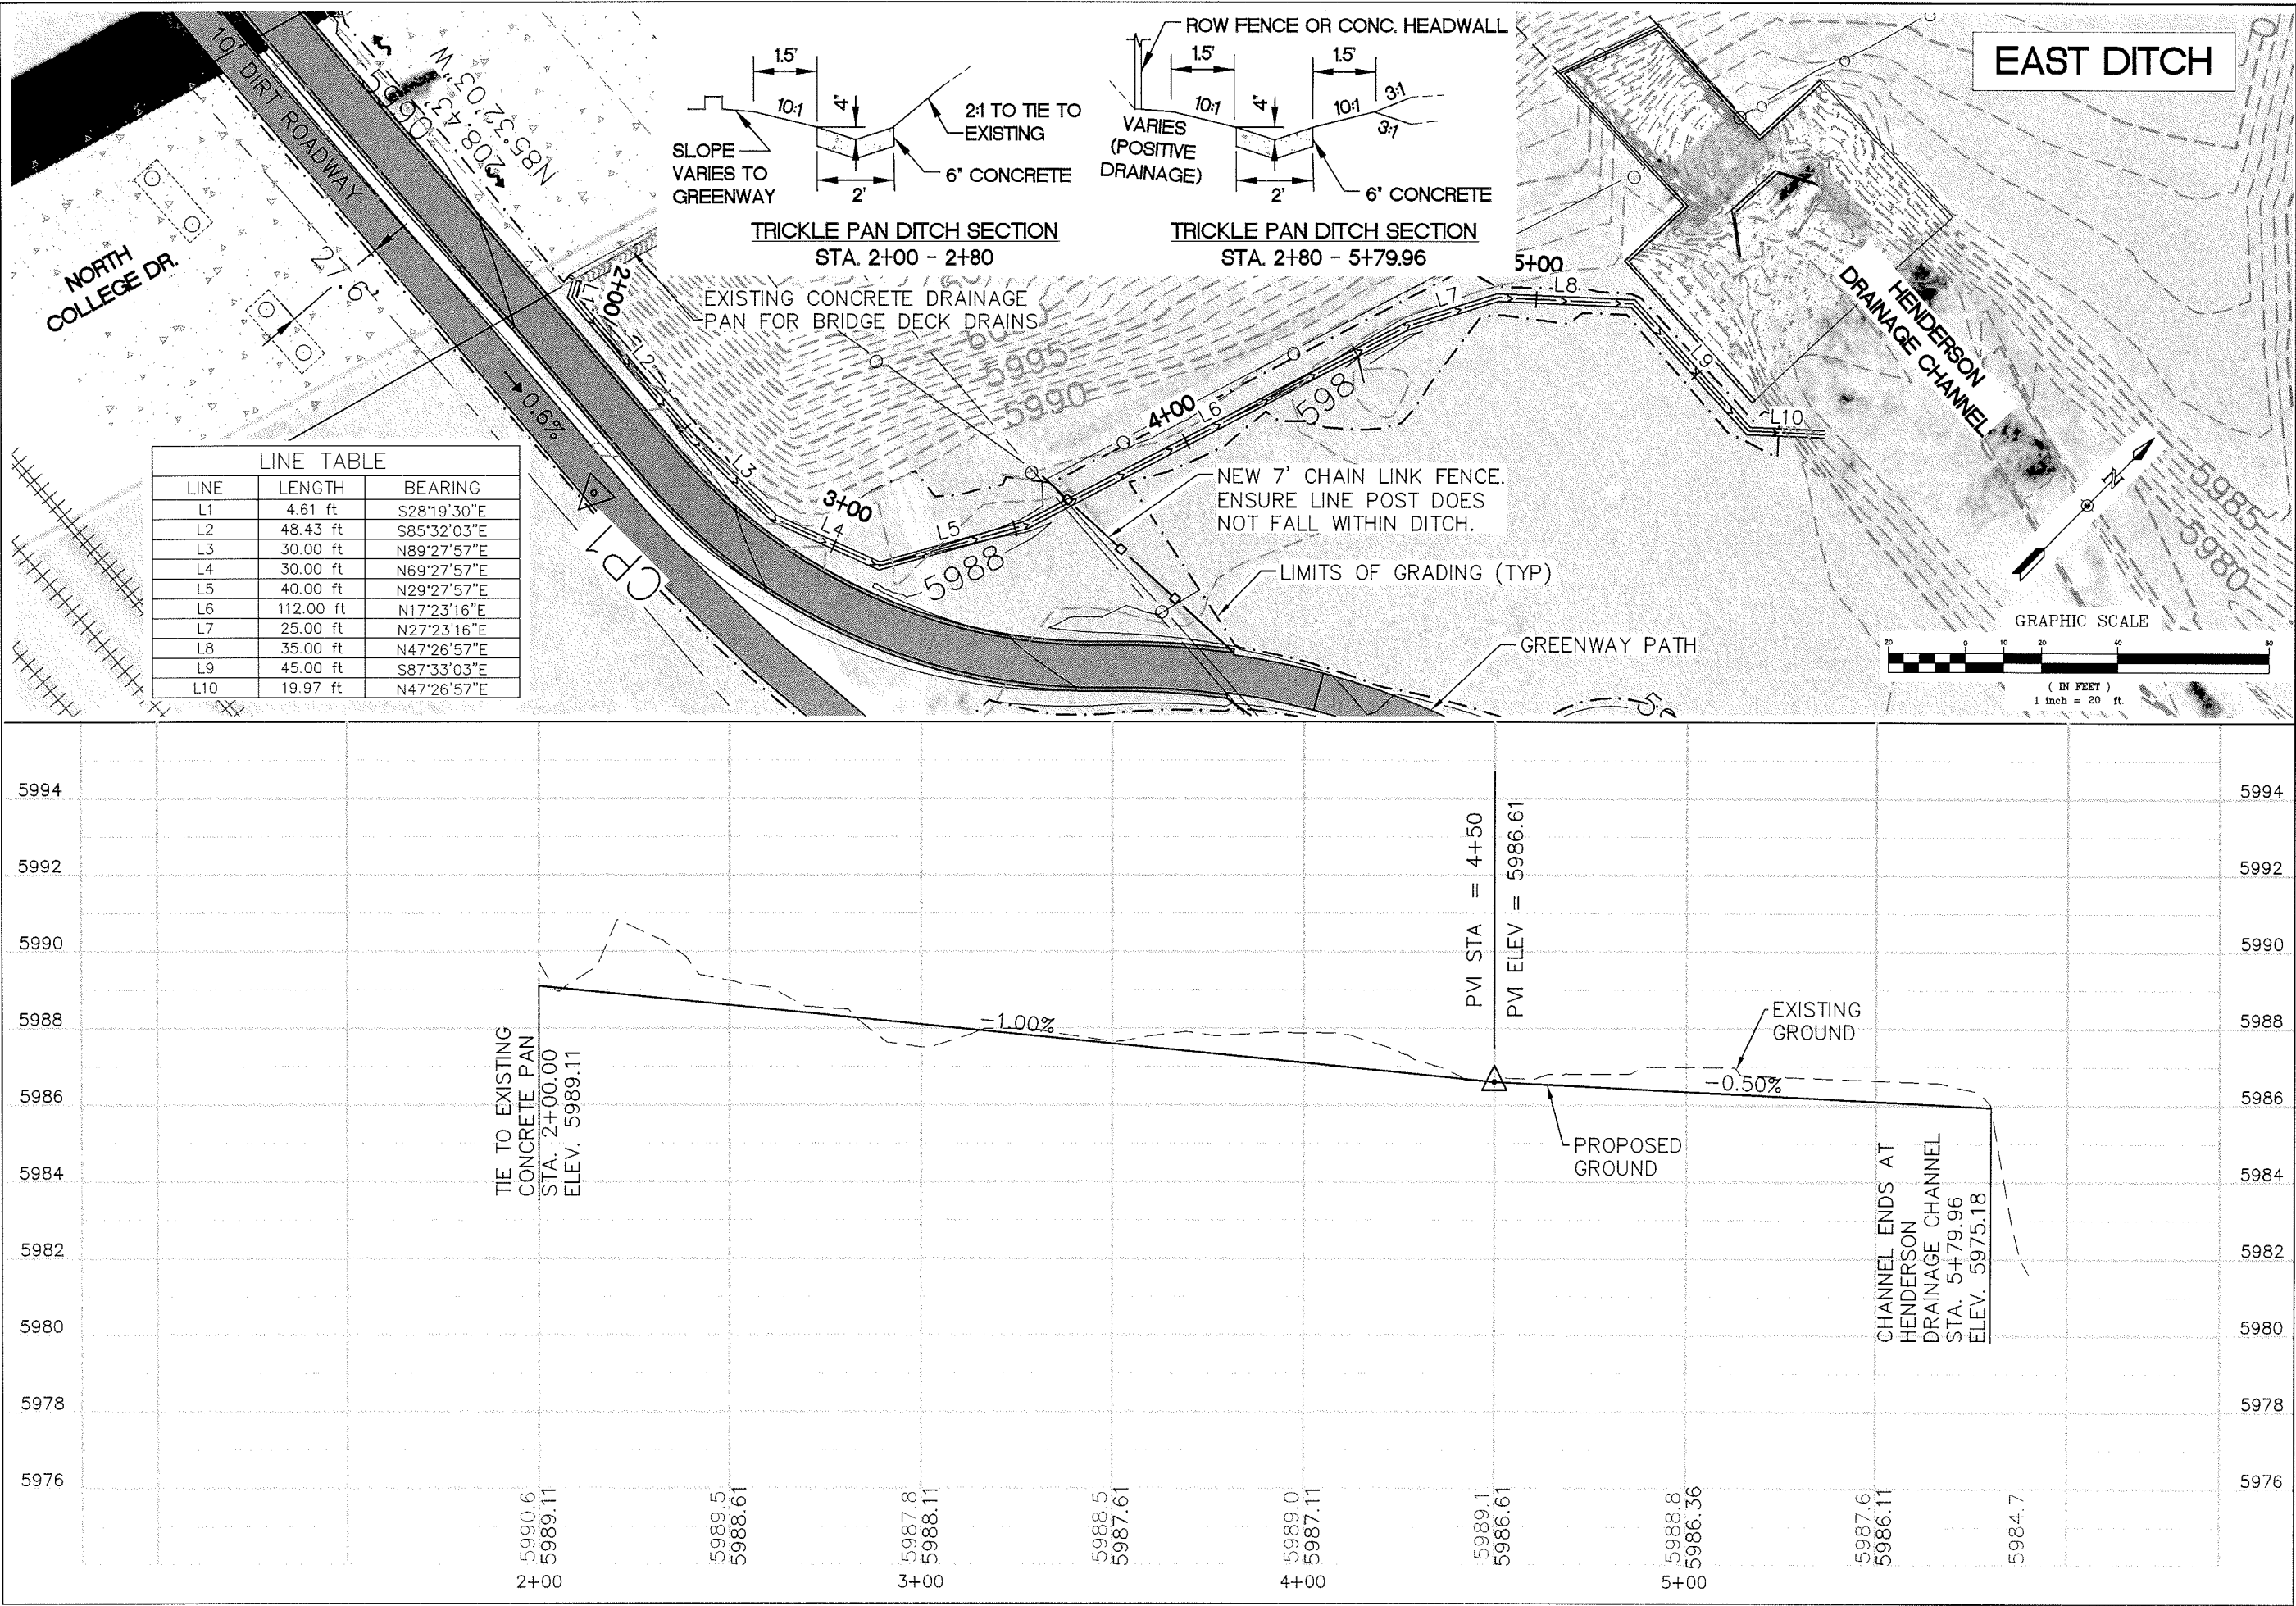

Engineers/Scientists/Surveyors
AYRES
224 W. Lincolnway, Suite 22
Cheyenne, WY 82001
Office (307) 634-8888
Fax (307) 364-2333
ASSOCIATES

GREENWAY PHASE IIb
PLAN AND PROFILE

CITY OF CHEYENNE
PARKS AND RECREATION DEPT.

Project Mgr.	GLM
Designed By:	DMH
Drawn By:	DMH
Approved By:	GLM
Date:	05/08/09

Revisions	Date
City Comments	5/29/09



Filename: S-PP2 illb

PROJECT NO.
32-1219.00

DRAWING NO.
PP2

SHEET **6** OF **7**

Drawing Name: Q:\32-1219_Greenway\Master\Sheets\Phase IIIb_UPRR_Sheets\3-pp8 IIIb_UPRR.dwg - Current tab: Layout1 - Print Time: Mon, 03 Aug 2009 - 10:17am By: hendond Last Save: Mon, 03 Aug 2009 - 10:10am

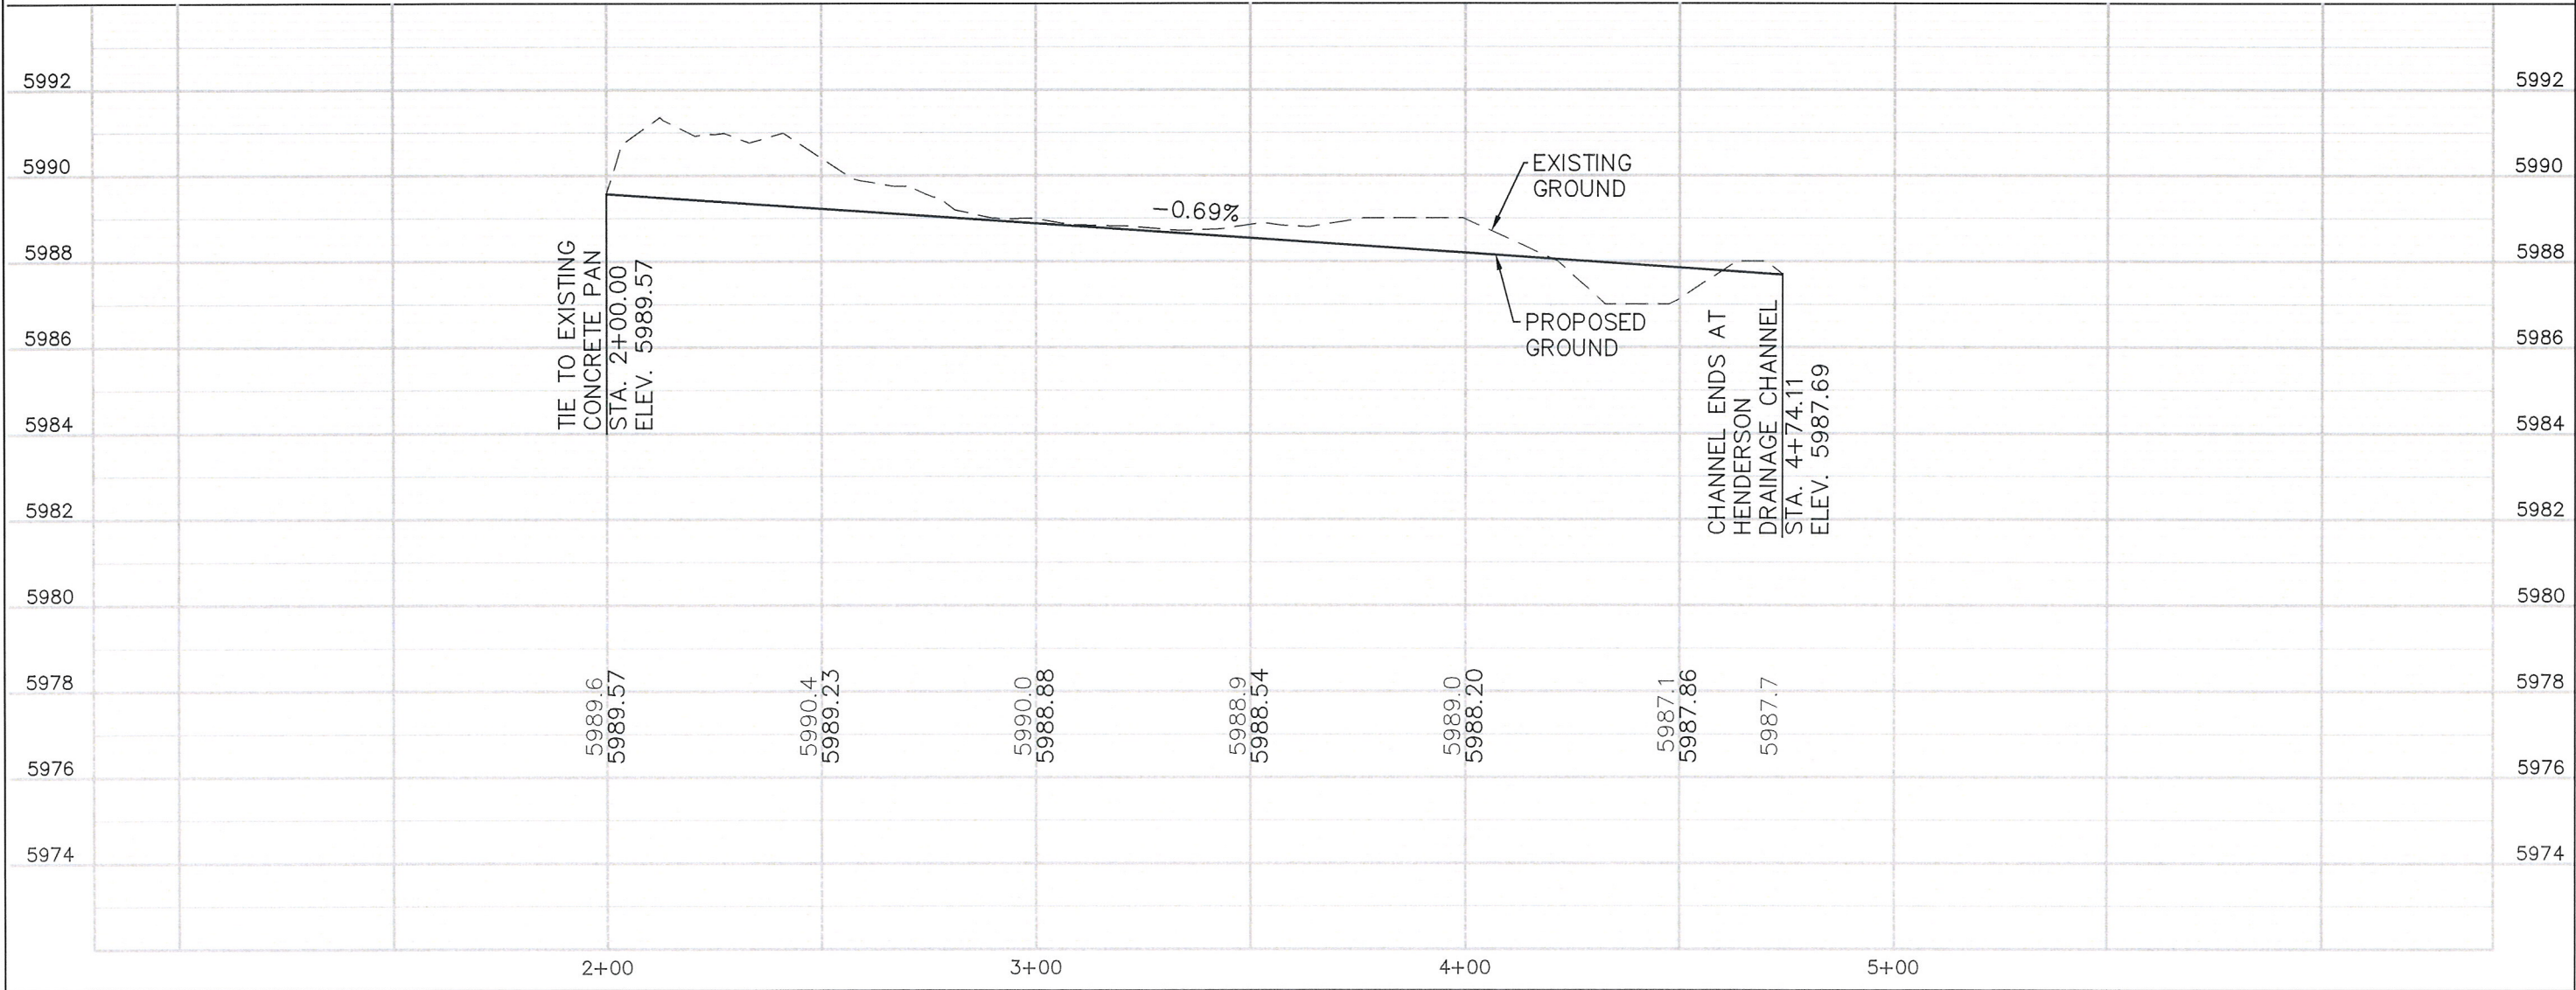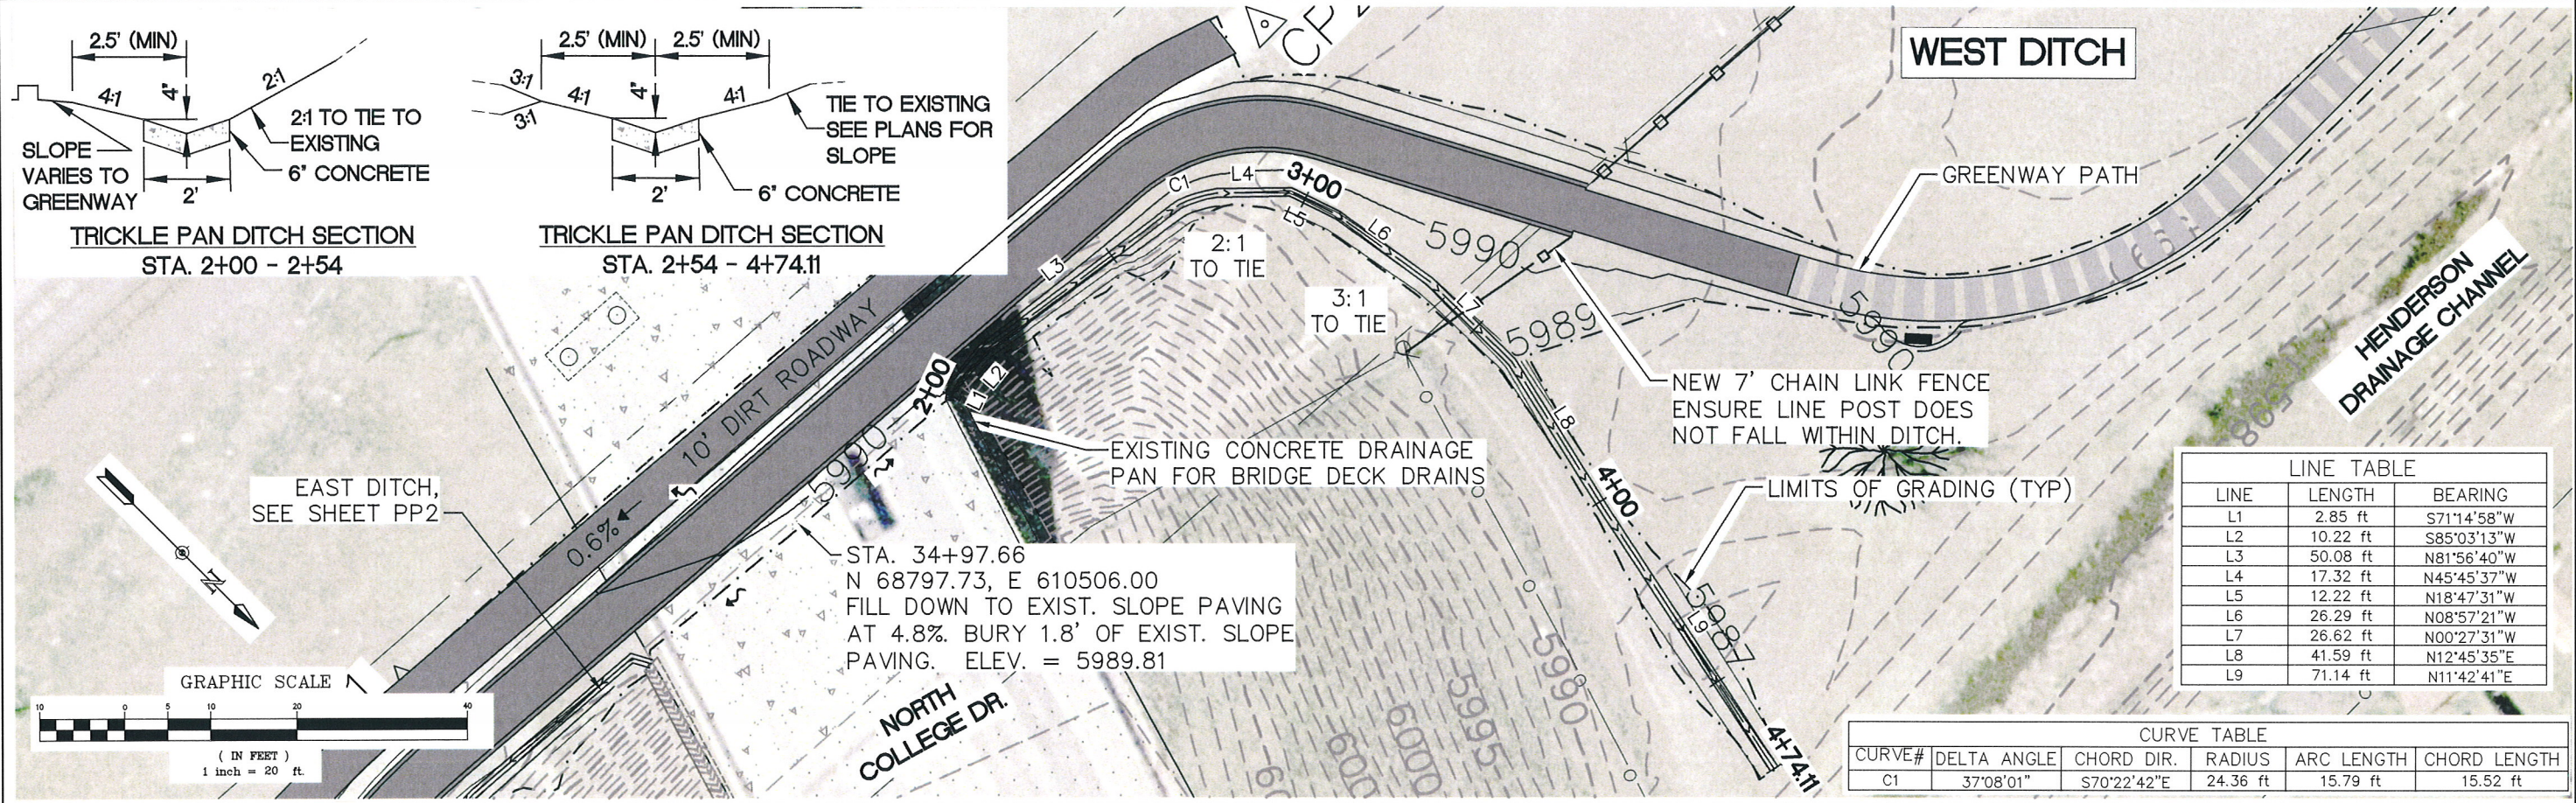

AVRES ASSOCIATES

Engineers/Scientists/Surveyors
224 W. Lincolnway, Suite 22
Cheyenne, WY 82001
Phone: (307) 634-9888
Fax: (307) 364-2353

GREENWAY PHASE IIIb

PLAN AND PROFILE

CITY OF CHEYENNE

PARKS AND RECREATION DEPT.

Revisions	Date
City Comments	5/29/29

Project Mgr. GLM
Designed By: DMH
Drawn By: DMH
Approved By: GLM
Date: 05/08/09

Filename: S-PP8 IIIb

PROJECT NO. **32-1219.00**

DRAWING NO. **PP3**

SHEET **7** OF **7**